

# **RDSH1000**

## **ROTARY HEAD**



**TEI ROCK DRILLS**

---


PO BOX 1309, MONTROSE, CO 81402

(800) 777-3745 • (970) 249-1515 • [www.teirockdrills.com](http://www.teirockdrills.com)

---

# RDSH1000

**Weight: 850 lbs.**

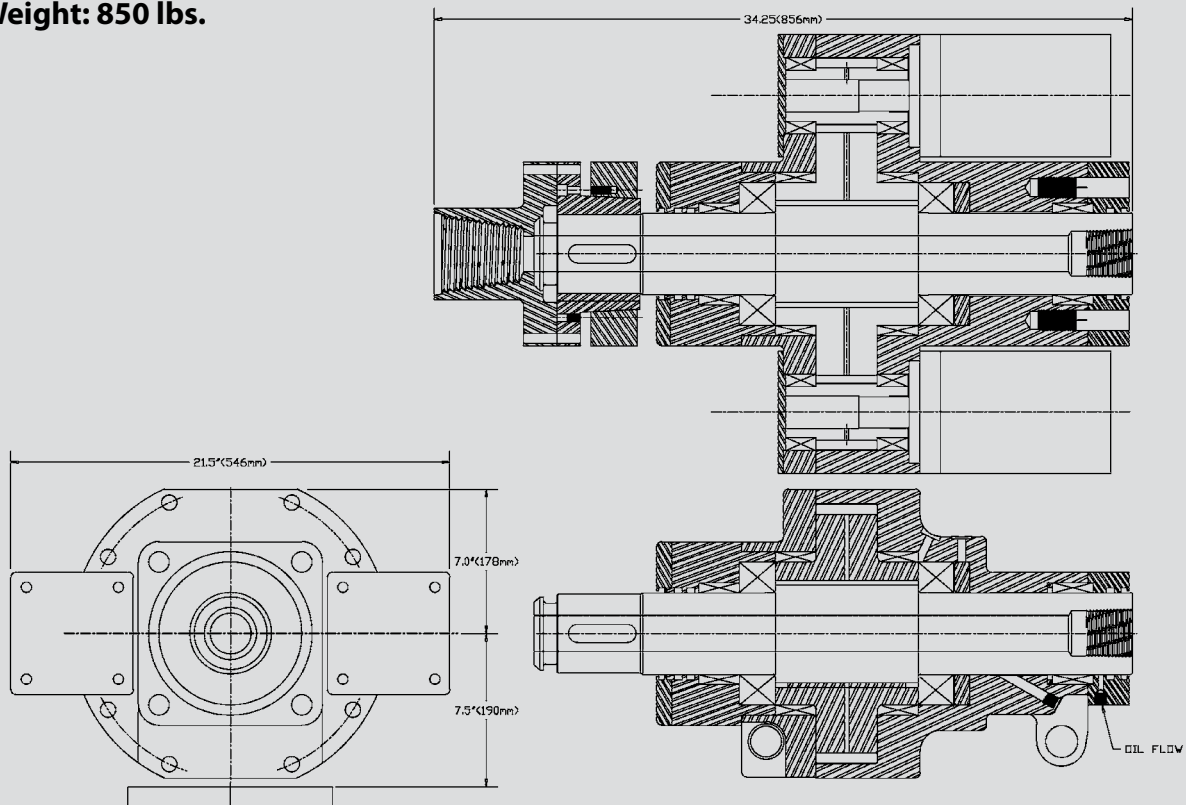

## DRILL SPECIFICATIONS

### Stock output threads for RDSH1000:

- 2 3/8 API Regular male and female
- 3 1/2 API Regular male and female
- 1 5/8 auger hex
- Other threads available

### Specifications for the RDSH1000:

- Up to 180 RPM
- Up to 10,000 ft/lbs of torque
- Hydraulic flow for 10,000 ft/lbs is  
1 RPM per 1 GPM of hydraulic flow
- Hydraulic supply pressure 2500 PSI
- 3/4" JIC hydraulic connections
- 1-1/2" flushing ID on output shaft

**Used on PCFH or HCFH feed systems.**



**ALL ATTACHMENT CARRIERS MUST BE PLUMBED WITH LOW PRESSURE RETURN AUXILIARY HYDRAULICS. AN ADDITIONAL HYDRAULIC OIL COOLER IS RECOMMENDED FOR PRODUCTION DRILLING. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**